

Counterline Series Non-GN

Food Storage & Bar Display

Fridge
Display or Store

A variety of depths, door styles, and installation heights make the Counterline commercial fridge series a flexible food storage solution. Counterlines can also be used front of house to display drinks.



CL400 / CC300(slim)



CL600 / CC500(slim)





CL800 / CC700(slim)

Standard finish: White, black or stainless steel

Standard models: 2, 3 & 4 glass or solid door

CC300(slim), CC500(slim) & CC700(slim) models have 80mm less depth than CL400, CL600 & CL800



Best Suited to:



Restaurants / Cafés



Quick Service Restaurants



Clubs / Pubs / Bars



Hospitality Venues



Accommodation



Medical / Aged Care



Schools

Quick Guide

Counterline Series Non-GN

High ambient rated	✓
SKOPE premium controller	✓
Glass upgrades - double Low-E or heated (swing door only)	✓
Glass or solid doors	✓
Flexible depths	✓
Remote available	✓
Customisable	✓
High efficiency rated models	✓

Standard Features

SKOPE premium controller
Premium quality long life LED lights
System overheat protection
Choice of depths
Adjustable legs & swivel castors
Front breathing refrigeration system

Benefits

Easy to use with pre-programmed features
Ensures effective product merchandising
Peace of mind
Space saving flexibility
Easy installation, positioning & relocation
Built in design to save space

Options

<ul style="list-style-type: none"> Stainless steel finish Full powdercoat colour range Remote R/H services Door locks Double Low-E argon glass 	<ul style="list-style-type: none"> Tropical heated glass Sliding doors Extra shelf & slides/clips Stainless steel benchtop Plinth mounting Stainless steel punched shelves
<ul style="list-style-type: none"> 1 year extended warranty 	


Specifications

	CL400		CL600		CL800	
Fridge/Freezer - doors	2 Door		3 Door		4 Door	
Self Contained/Remote	Self Contained	Remote	Self Contained	Remote	Self Contained	Remote
Model ID	CL400-2SW	CL400r-2SW	CL600-3SW	CL600r-3SW	CL800-4SW	CL800r-4SW
External						
Dimensions (W x D x H mm)	1600 x 680 x 725	1455 x 680 x 725	2210 x 680 x 725	2065 x 680 x 725	2820 x 680 x 725	2675 x 680 x 725
Total floor area (m ²)	1.09	0.99	1.50	1.40	1.92	1.52
Weight (kg)	127	112	140	125	153	138
Door	Glass		Glass		Glass	
Electronic controller	Yes		Yes		Yes	
Remote duty (Watts @ SST)	n/a	480 @ -5°C	n/a	615 @ -5°C	n/a	750 @ -5°C
Breathes from / Expels air to	Front / Front		Front / Front		Front / Front	
Cabinet construction	Powder coated steel / SS		Powder coated steel / SS		Powder coated steel / SS	
Drainage (plumbing required)	No	Yes	No	Yes	No	Yes
Can be plinth mounted	Yes		Yes		Yes	
Supplied with legs & castors	Yes		Yes		Yes	
Internal						
Gross volume (litres)	390		600		810	
Lighting	1 x T8 LED tube		1 x T8 LED tube		2 x T8 LED tube	
No. of shelves (per door)	2		2		2	
Shelf design	Plastic coated wire		Plastic coated wire		Plastic coated wire	
Total shelf area (m ²)	1.74		2.7		3.66	
Product facings (600ml PET bottle)	28		44		60	
Total product loading (kg)	196		308		420	
Internal material	Powder coated steel / SS		Powder coated steel / SS		Powder coated steel / SS	
Performance						
MEPS category (M1-food & drinks, M2 drinks)	M1		M2		M2	
MEPS efficiency (kWh/24h/m ²) @ Climate Class 3	12.75		11.65		8.74	
TEC (kWh/24h) @ Climate Class 3	5.62		7.72		7.72	
Maximum ambient temperature	40°C		40°C		40°C	
Temperature range	1°C to 4°C		1°C to 4°C		1°C to 4°C	
Refrigerant / Charge	R134a / 425g	Specify	R134a / 425g	Specify	R134a / 425g	Specify
Total display area (m ²)	0.46		0.69		0.93	
Electrical						
Electrical power (kW)	0.55	0.07	0.77	0.17	0.91	0.24
Current draw (Amps)	2.3	0.3	3.2	0.7	3.8	1.0
10 Amp 3 pin plug	Yes		Yes		Yes	
Light switch on controller	Separate switch		Separate switch		Separate switch	


CC300 Slim		CC500 Slim		CC700 Slim	
2 door		3 door		4 door	
Self Contained	Remote	Self Contained	Remote	Self Contained	Remote
CC300-2SW	CC300r-2SW	CC500-3SW	CC500r-3SW	CC700-4SW	CC700r-4SW
1600 x 600 x 725	1455 x 600 x 725	2210 x 600 x 725	1915 x 596 x 920	2820 x 600 x 725	2675 x 600 x 725
0.96	0.87	1.33	1.23	1.70	1.60
122	107	135	120	148	133
Glass		Glass		Glass	
Yes		Yes		Yes	
n/a	400 @ -5°C	n/a	540 @ -5°C	n/a	660 @ -5°C
Front / Front		Front / Front		Front / Front	
Powder coated steel / SS		Powder coated steel / SS		Powder coated steel / SS	
No	Yes	No	Yes	No	Yes
Yes		Yes		Yes	
Yes		Yes		Yes	
335		517		700	
1 x T8 LED tube		1 x T8 LED tube		2 x T8 LED tube	
2		2		2	
Plastic coated wire		Plastic coated wire		Plastic coated wire	
1.48		2.29		3.11	
28		44		60	
168		264		360	
Powder coated steel / SS		Powder coated steel / SS		Powder coated steel / SS	
M1		M1		M2	
11.65		9.83		9.75	
5.39		6.82		9.02	
40°C		40°C		40°C	
1°C to 4°C		1°C to 4°C		1°C to 4°C	
R134a / 425g	Specify	R134a / 425g	Specify	R134a / 425g	Specify
0.46		0.69		0.93	
0.55		0.76		0.91	
0.07		0.16		0.24	
2.3		3.2		3.8	
0.3		0.7		1.0	
Yes		Yes		Yes	
Separate switch		Separate switch		Separate switch	

Line Drawings


CL400

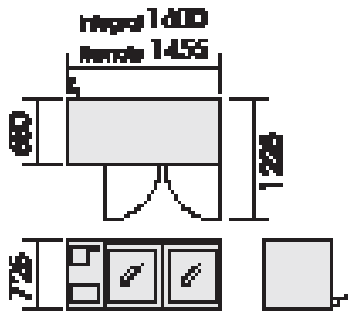

CL600

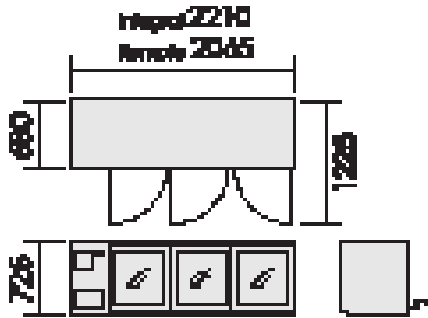


CL800

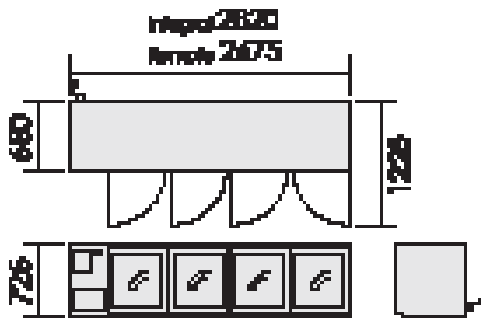


Line Drawings


CC300 Slim

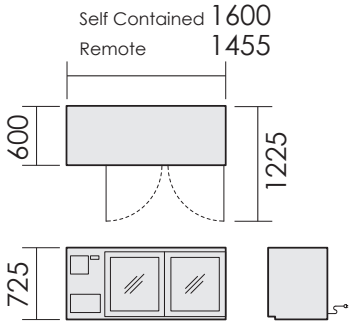

CC500 Slim

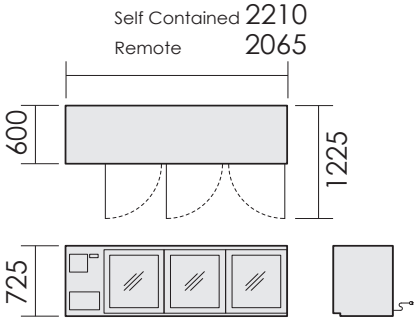

CC700 Slim

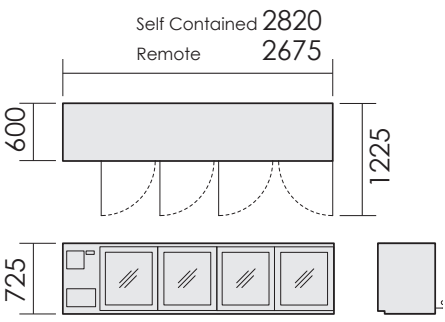

Cabinet height variation:
 With supplied castors, add 80mm-105mm
 With supplied adjustable legs, add 135mm-165mm
 With optional benchtop, add 25mm
 Cabinet depth variation:
 CC300, CC500, CC700 with benchtop, add 20mm

The product information presented is for guideline purposes only. Always refer to the latest product specification sheet for accuracy and detail, and allow for dimensional tolerances (see glossary).