


specifications

SKT650-A Series


Top Mount ActiveCore
One Door Upright Chiller

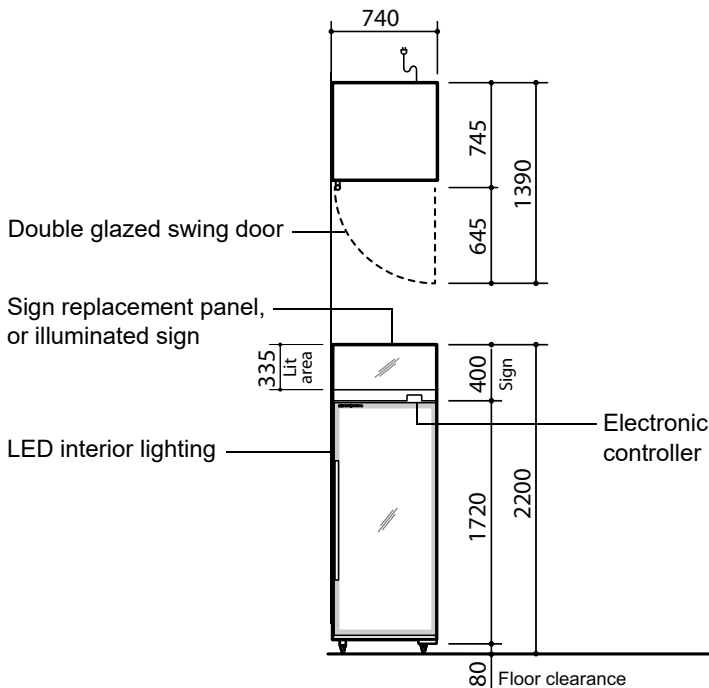

CABINET DIMENSIONS

	External	Internal
Height:	2200mm	1570mm
Width:	740mm	640mm
Depth:	745mm	554mm
Floor area:	0.55m ² (includes door handle)	

* Depth 695mm excludes removable door handle and door lock bracket.

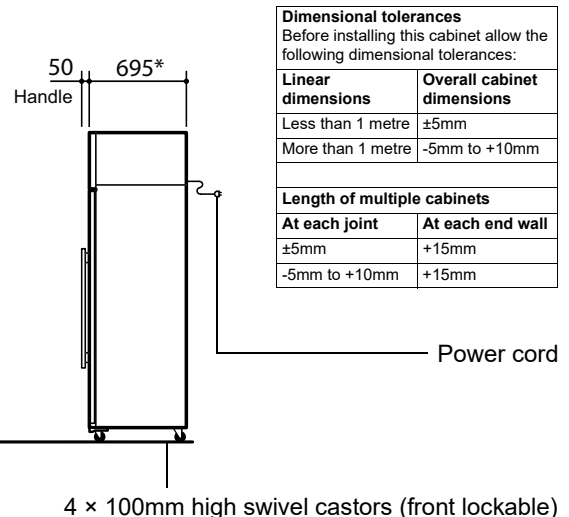

Copyright © 2016 SKOPE Industries Limited

GENERAL SPECIFICATIONS

Temperature range	1°C to 4°C (adjustable up to 15°C)
Climate class	5 (Tested at 43°C)
Door	Lockable, self-closing, reversible, double glazed, single Low-E, argon filled, toughened safety glass swing door (hinged RH)
Internal Volume	610 litres
Shelves	5 adjustable height wire shelves: 625mm wide × 470mm deep
Power supply	220-240 Volts a.c. 50 Hz, single phase supply. Supplied with 10 Amp 3-Pin plug
Current draw	3.5 Amps (includes unit 2.9 Amps)
Refrigeration system	Removable ActiveCore top mount refrigeration unit (UTHCCI-0002)
Refrigerant	R134a / 380g
Nominal capacity	836 Watts
Controller	Carel S4 electronic controller
Drainage	No plumbing required
Weight	170 kg

INDIVIDUAL SPECIFICATIONS

Model	SKT650-A	SKT650-AC	SKT650-ACX
Part number	MT65GY	MT65BY	MT65BX
Sign	Sign replacement panel	400mm high illuminated sign	
Sign lighting	n.a.	1 × 11W T8 LED tube (Ø26mm × 600mm)	
Interior side light	1 × 20W (1400mm) LED module strip RH side light (all models)		
Interior shelf lights	n.a.	n.a.	5 × 9W LED module strip shelf lights

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0463 Rev. 2.1 Mar.2018



SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.co.nz, Website: www.skope.com

