
## specifications




## CC500r-3SW

Counterline - Slimline 3 Door (Swing), Remote Fridge

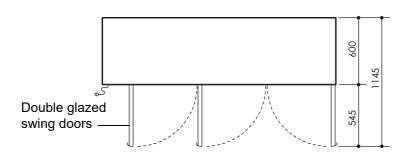

## **CABINET DIMENSIONS**

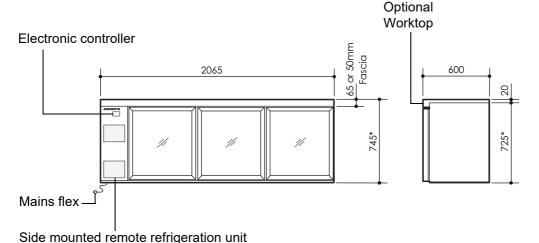

## **CABINET SPECIFICATIONS**

**Doors** Self-closing, double glazed, toughened Low-E safety glass with aluminium

extrusion or insulated solid doors

Internal door opening size 3 door openings: 544mm high x 520mm wide

Shelves Adjustable height, white plastic coated, steel wire shelves - two per door

Worktop (optional) Optional 20mm high stainless steel worktop with 65mm fascia

Electrical safety climate class 5

Internal lighting 1 x 24W T8 Frosted LED Tube (Ø26 x 1500mm, 5500K) - Switched

**Electrical** 230-240 Volts a.c. 50 Hz, single phase supply, 0.7 Amps

Temperature range +1°C to +4°C

GEMS class M1

**GEMS energy consumption** 5.59 kWh/24h

GEMS annual running cost \$613 p.a. (@ \$0.30/kWh)

**Refrigeration system** Side mounted, remote refrigeration unit

Electronic controller SKOPE CAREL ir33

**Refrigerant** Selected at time of order: R134a, R404A, R507, R22

**Pipe connection size** Liquid line: 1/4". Suction line: 3/8"

Remote refrigeration duty 540 Watts

**Insulation** 50mm polyurethane foam

**Drainage** Small drain supplied. Must be connected to permanent drain by installer.

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2007 SKOPE Industries Limited

PSS0070 Rev. 4.2 Mar. 2021







Email: skope@skope.com Website: www.skope.com



<sup>\*</sup> Height excludes castors or legs