
specifications

GC110r



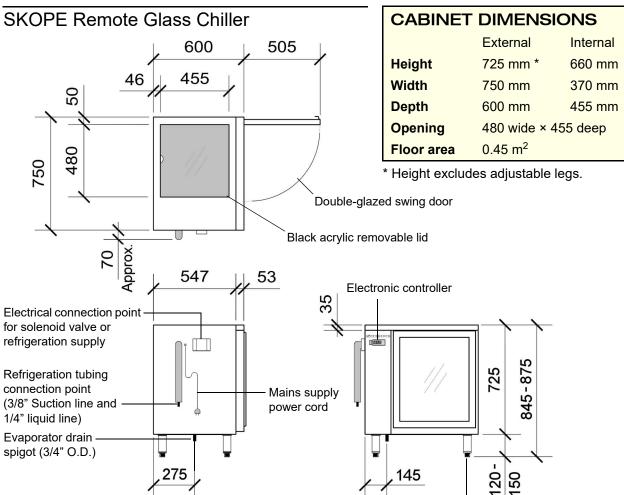

Copyright © 2008 SKOPE Industries Limited

CABINET SPECIFICATIONS	
Refrigeration system	Remote refrigeration unit (left hand service) –not supplied
Refrigerant	Thermostatic expansion valve dedicated to either R134a or R404A
Pipe connection size	Liquid line: 1/4"
	Suction line: 3/8"
Remote refrigeration duty	450 watts (at -5°C saturated suction temperature (SST)) required
Cabinet internal volume	110 litres
Insulation	50 mm polyurethane foam
Classification	Climate class: 5 (40°C)
	Product class: M2
Drainage	3/4" (19 mm) O.D. evaporator drain spigot fitted (requires plumbing)
Electrical supply	220-240 volts a.c. 50 Hz, 0.37 amps
Controls	CAREL S4 EVO
Power cord	3.0 metre flexible power cord fitted with 3-pin plug
Door	Self-closing, double-glazed low-e, argon-filled, toughened clear safety glass Right hand hinged (left hand hinge kit available)
Shelves	Three shelf runners to take 14" (355 mm) wide x 17" (432 mm) deep glass racks (racks not supplied)
Total weight	55 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

