






**FRONT
VIEW**

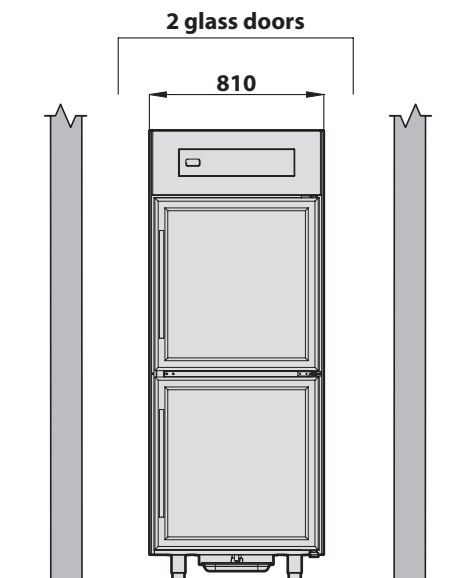

**SIDE
VIEW**

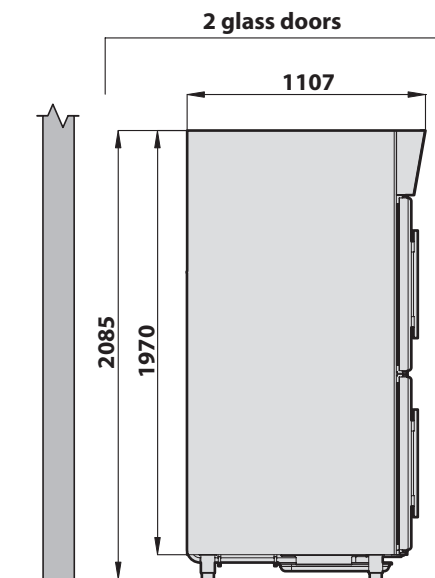

**TOP
VIEW**

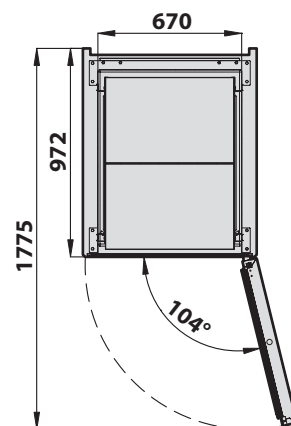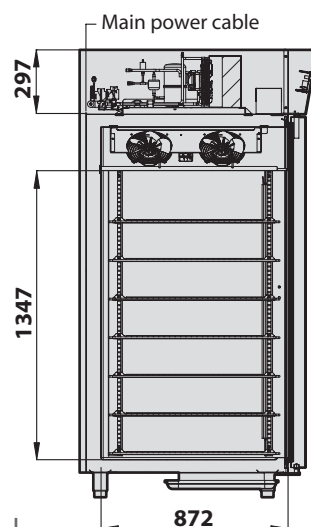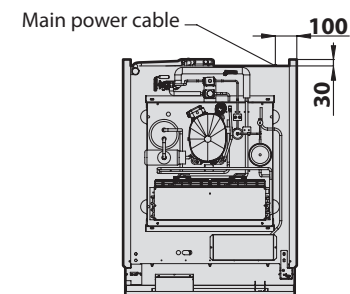

**INTERIOR
VIEW**

GENERAL CHARACTERISTICS

Number of trays 600 x 800 mm	-	33
Number of trays 360 x 165 x 120 mm	-	54
Effective internal Cell volume UNI EN 16825	dm ³	610,0
Number of compartments	-	1
Category		Vertical
Working temperature		Multipurpose: frozen and chilled food
IRINOX Spa, Via Madonna di Loreto 6/B 31020 Corbanese di Tarzo (TV) Italy		

HEIGHT

Standard feet	mm	2085	115 ÷ 165
Lowered feet option	mm	2050	80 ÷ 115
Raised option	mm	2150	180 ÷ 230
Wheel option	mm	2125	155

Measurement in millimeters

IRINOX

Mod.: **CP ONE**

Cod.: **PCPONExAAxxxx**

Ed.: **01/08/2018** Rev.: **00**

HOLDING CABINET WITH INTEGRATED AIR CONDENSING UNIT (A)

Electric supply:	-	230V-1N+PE 50Hz	230V-1N+PE 60Hz	-	-	200V-2+PE 50/60 Hz
Total rating (FLI)	kW	1,30	2,10	-	-	1,90 / 1,90
Full load amps (FLA)	A	6,40	10,60	-	-	9,00 / 9,00
Main power cable	mm ²	3G1.5	3G1.5	-	-	3G1.5
Compressor rating	HP	0,75				
Refrigeration Yield (-10/40°C)	W	1458	1681	-	-	1458 / 1601
Condenser rating (-10/40°C)	W	2248	2692	-	-	2248 / 2692
Refrigerant type:	-	R404A / R452A				
Nominal refrigerant charge:	kg gas	1,30				
Minimum Air Flow	m ³ /h	700	700	-	-	700 / 700
Maximum ambient air temperature:	°C	43				
Cabinet dimension: (W × D × H)	mm	810 × 1107 × 2085 × № 1				
Internal working dimensions (W × D × H)	mm	670 × 872 × 1347 × № 1				
Cabinet weight:	kg	240,0				
Compressor Noise (5 m)	dB(A)	-	-	-	-	- / -

Standard packing

Gross Weight	kg	240
Dimensions (W × D × H)	mm	890 × 1240 × 2538 × № 1
Volume	m ³	2,54

Measurement in millimeters

IRINOX

Mod.: **CP ONE**

Cod.: **PCPONExAAxxxx**

Ed.: **01/08/2018** Rev.: **00**