




**FRONT
VIEW**

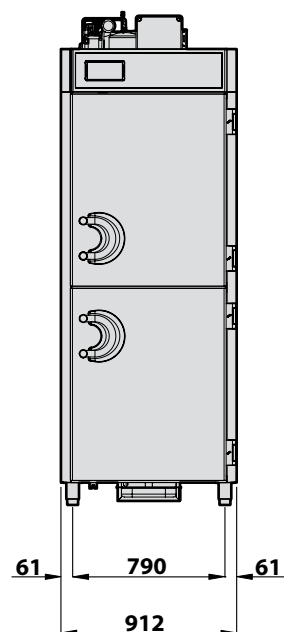

**SIDE
VIEW**

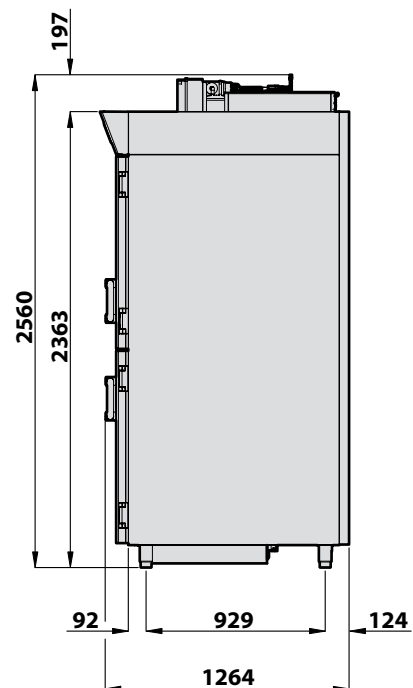

**TOP
VIEW**

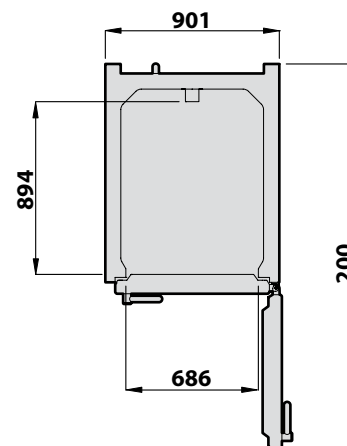

GENERAL CHARACTERISTICS

Number of trays 600 x 400 mm (H= 40 mm)	-	80
Number of trays 600 x 800 mm (H= 40 mm)	-	40
Effective internal Cell volume UNI EN 16825	dm ³	715,2
Number of compartments	-	1
Category		Vertical
Working temperature		Multipurpose: frozen and chilled food
IRINOX Spa, Via Madonna di Loreto 6/B 31020 Corbanese di Tarzo (TV) Italy		

HEIGHT

Standard feet	mm	2560	115 ÷ 165
Lowered feet option	mm	2530	85 ÷ 115
Raised option	mm	-	- ÷ -
Wheel option	mm	2600	155

Measurement in millimeters

IRINOX

Mod.: **CP 40**

Cod.: **PCP040MxAAxxxx**

Ed.: **01/08/2018** Rev.: **00**

HOLDING CABINET WITH INTEGRATED AIR CONDENSING UNIT (A)

Electric supply:	-	230V-1N+PE 50Hz	230V-1N+PE 60Hz	-	-	
Total rating (FLI)	kW	2,40	2,40	-	-	- / -
Full load amps (FLA)	A	12,30	13,10	-	-	- / -
Main power cable	mm ²	3G2.5	3G2.5	-	-	-
Compressor rating	HP	-				
Refrigeration Yield (-10/40°C)	W	1807	1807	-	-	- / -
Condenser rating (-10/40°C)	W	2748	2748	-	-	- / -
Refrigerant type:	-	R404A / R452A				
Nominal refrigerant charge:	kg gas	2,20				
Minimum Air Flow	m ³ /h	1100	1100	-	-	- / -
Maximum ambient air temperature:	°C	42				
Cabinet dimension: (W × D × H)	mm	900 × 1245 × 2360 × № 1				
Internal working dimensions (W × D × H)	mm	690 × 900 × 1540 × № 1				
Cabinet weight:	kg	308,0				
Compressor Noise (5 m)	dB(A)	53,0	53,0	-	-	- / -

Standard packing

Gross Weight	kg	373
Dimensions (W × D × H)	mm	1000 × 1300 × 2600 × № 1
Volume	m ³	3,50

Measurement in millimeters

IRINOX

Mod.: **CP 40**

Cod.: **PCP040MxAAxxxx**

Ed.: **01/08/2018** Rev.: **00**