
specifications



BB380r-2SL

SKOPE Backbar

2 Sliding Door Remote Chiller (RB2002V)



CABINET DIMENSIONS


External Internal


Height: 920mm* 758mm

Width: 1355mm 1020mm

Depth: 596mm 530mm

Floor area: 0.81m²

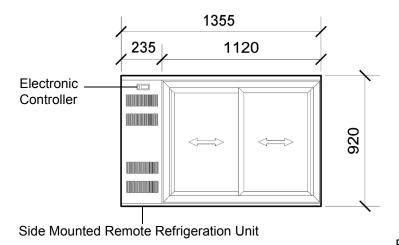



Copyright © 2008 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system: Electronic controlled, side mounted, remote refrigeration unit

Refrigerant: Thermostatic expansion valve fitted as standard to suit R134a or R404A

Pipe connection size: Liquid line: 1/4". Suction line: 3/8"

Remote refrigeration duty: 528 Watts
Cabinet internal volume: 380 litres

Insulation: 50mm thick, high density cyclo-isopentane polyurethane foam

Cabinet temperature range: +1°C to +4°C up to 32°C ambient

Drainage: Evaporator drain fitted inside service compartment (requires plumbing)

Electrical: 230-240 Volts a.c. 50 Hz, 0.9 Amps

Internal lighting: 1 x 20W T8 Frosted LED Tube (Ø26 x 900mm, 5500K) - Switched

Internal door opening size: 2 door openings: 720mm high x 470mm wide

Doors: Self-closing, double glazed toughened single Low-E safety glass sliding

doors

Worktop (optional): Optional 25mm stainless steel worktop

Shelves: Two adjustable shelves per door: 495mm wide x 440mm deep

Weight: 120 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0209 Rev. 2.1 Apr. 2016





^{*} Height excludes castors, adjustable legs or optional worktop.