# specifications



# **SKB900-A Series**

# Bottom Mount ActiveCore Two Door Upright Chiller 1085 Double glazed swing doors

## **CABINET DIMENSIONS**

 External
 Internal


 Height:
 2005mm\* / 2195mm\*\*
 1454mm

 Width:
 1085mm
 985mm

 Depth:
 795mm
 602mm

 Floor area:
 0.86m² (includes door handle)

- Height 2005mm without sign (model SKB900-A)
- \*\* Height 2195mm with sign (SKB900-AC/ACX)
- \*\*\* Depth 745mm excludes removable door handle, door lock bracket and rear stand-off.

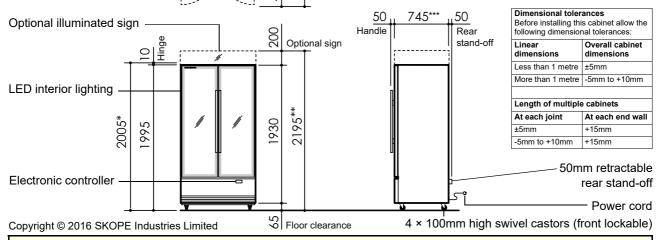

### **GENERAL SPECIFICATIONS**

Temperature range 1°C to 4°C (adjustable up to 15°C)

Climate class 5 (Tested at 43°C)

Doors Lockable, self-closing, double glazed, single Low-E, argon filled, toughened safety glass swing doors (hinged

LH, RH)

Internal Volume 880 litres

Power supply 220-240 Volts a.c. 50 Hz, single phase supply. Supplied with 10 Amp 3-Pin plug

**Current draw** 4.5 Amps (includes unit 2.9 Amps)

Refrigeration system Removable ActiveCore bottom mount refrigeration unit (UBHCCI-0001)

Refrigerant R134a / 380g Nominal capacity 836 Watts

Controller Carel S4 electronic controller

Drainage No plumbing required

Weight 220 kg

### INDIVIDUAL SPECIFICATIONS

 Model
 SKB900-A
 SKB900-AC
 SKB900-ACX

 Part number
 MB90GY
 MB90BY
 MB90BX

Sign n.a. 200mm high illuminated sign

Sign lighting n.a. 1 × 17W T8 LED tube (Ø26mm × 900mm)

Interior side lights 2 × 20W (1400mm) LED module strip side lights (all models)

Interior shelf lights n.a. n.a. 10 x 7W LED module strip shelf lights

Shelves 8 × wire and 2 × stainless steel 10 × wire and 2 × stainless steel 10 × wire and 2 × stainless steel

Wire shelves: Adjustable height, 480mm wide × 520mm deep

Stainless steel bottom shelf: Not adjustable, 485mm wide × 515mm deep

SKOPE Industries Limited reserve the right to alter specifications without notice.



PSS0462 Rev.3.0 Mar. 2018



SKOPE INDUSTRIES LIMITED